

Controlled, consistent coatings and bonding in a miniature design.

UV-cure and light-cure adhesives

resins

solvents

UV coatings



Performance Guarantee

"The valve start/stop performance is very good; no droplets formed. The size is much smaller, a particular advantage for the dispense arm robot."

EFD OEM customer

The 702V-SS mini-diaphragm dispense valve is designed for drip-free coatings and consistent shot-to-shot bonding of UV-cure adhesives and other low-to-medium viscosity fluids, especially where valve mounting space is at a premium.

At 60% smaller and 70% lighter than other dispense valves, the 702V-SS mounts easily and can be positioned close to the production parts. With its lightweight design, the valve is also easy to move, which means less maintenance and wear on semi-automated and automated machine robotic arms.



Features


- Consistent shot-to-shot performance
- Quick, clean cutoff eliminates drips
- Low maintenance for millions of cycles
- Tamper resist stroke adjustment
- Unique design eliminates trapped air and bubbles

* Available with PTFE diaphragm for autoclaving processes

Mini-diaphragm valve systems

The complete system includes the 702V-SS dispense valve, EFD ValveMate™ 8000 controller, fluid reservoir and dispense tip.


Expert technical assistance and high quality standards ensure productive, trouble-free performance. EFD offers a full line of reliable dispensing systems to meet your specific application requirements.

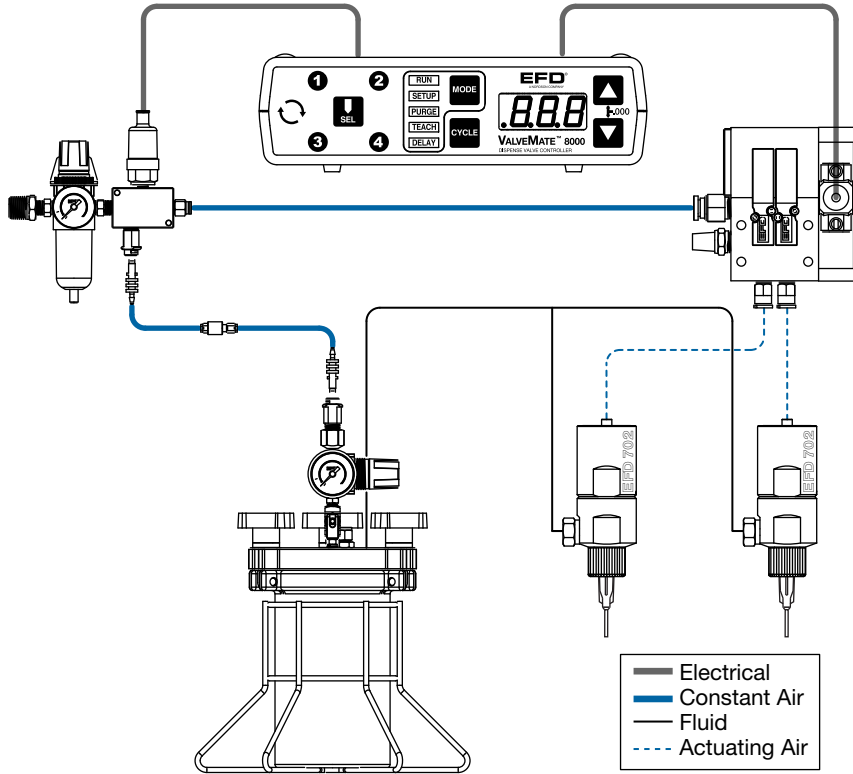

702V-SS Valve

The dispense valve incorporates an inert polymer diaphragm that isolates the fluid from the valve actuating cylinder and provides very fine flow control for all low to medium viscosity fluids. The unique design provides quick valve ON/OFF and the ability to rapidly obtain maximum flow rates.

Amount dispensed depends on valve open time, fluid pressure, fluid viscosity, stroke adjustment and tip size.

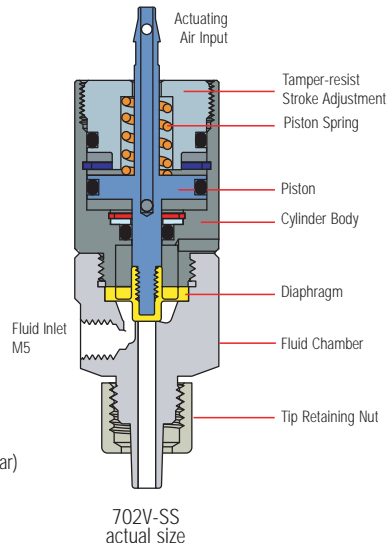

- Size:** 2.50" x 0.75" diameter (63.5 mm x 19.1 mm)
- Weight (less fittings):** 1.74 oz (49.3 grams)
- Actuating air pressure required:** 70 to 90 psi (4.8 to 6.2 bar)
- Maximum fluid pressure:** 70 psi (4.8 bar)
- Fluid inlet thread:** M5
- Mounting:** Adjustable mounting block (specify P/N 7002VM)
- Cycle rate:** Exceeds 500 per minute
- Air cylinder body:** Type 303 stainless steel
- Fluid chamber:** Type 303 stainless steel
- Piston:** Type 303 stainless steel
- Diaphragm:** UHMW* polyethylene or PTFE Teflon®, FDA approved
- Tip retaining nut:** Aluminum

All stainless steel parts are passivated.

*Ultra High Molecular Weight polyethylene

ValveMate 8000 Controller

Valve open time is the primary control of deposit size. The ValveMate controller puts push-button adjustment of valve open time where it needs to be — at the valve.

- Multi-valve control- up to (4) valves
- Maximum machine efficiency
- Increased production output
- Easy deposit size control
- On-the-fly adjustability
- Interfaces with Programmable Logic Controller (PLC)

Fluid Reservoirs

EFD reservoirs are supplied with precision, constant-bleed regulators to ensure consistent fluid pressure to the valve.

Tank reservoirs are available in 1.0, 5.0 and 19.0 liter capacities. Cartridge sizes range from 2.5 to 32 ounces.

Dispense Tips

The correct tip selection is very important to achieve proper performance of dispense valves.

In addition to its standard range of general purpose stainless steel tips, EFD offers special PTFE-coated stainless steel tips that provide a clean cutoff to prevent wicking and drips. Contact EFD to order a supply.

*PolyTetraFluoroEthylene



For application assistance in the USA, call 800-556-3484.

For EFD sales and service in over 30 countries, contact EFD or go to www.efd-inc.com

EFD, Inc., a Nordson Company
 977 Waterman Avenue
 East Providence, RI 02914-1342 USA

Tel.: +1-401-434-1680 Fax +1-401-431-0237
info@efd-inc.com www.efd-inc.com

Teflon is a registered trademark of DuPont.
 ©2008 Nordson Corporation v020708 Patent pending